

**HIGH PERFORMANCE
THE POWER OF GAS,
THE SAFETY OF HOT AIR**

(Page 2)
How on earth does SIROCCO achieve such a great performance? It's the combination of gas and compressed air acting like a power booster that enables SIROCCO to reach temperatures close to 800 °C with almost 12 kW at 3 bar, which by the way means...



**EASE OF HANDLING
EASILY PORTABLE**

(Page 6)
It's really amazing! Weighing barely more than a kilo, the SIROCCO is the proof that ultra-strong and ultra-light weight can be synonymous. For the leak sealing specialist, professional constraints are fully taken into consideration by the SIROCCO's particularly high comfort index rating. But it's not a first for Express, as has already been widely acknowledged...



**ACHIEVEMENT
EUREKA**

(Page 12)
A label of excellence and symbol of European industrial design, EUREKA is a major asset for SIROCCO, a symbol of innovation and technology...


www.express.fr

SUCCESS
THE TECHNICAL ACHIEVEMENTS RECORD OF GUILBERT EXPRESS

**SIROCCO FLAMELESS TORCH:
A NEW ERA FOR THE WATERPROOFING-INDUSTRY**



SPECIAL EDITION - 106th year

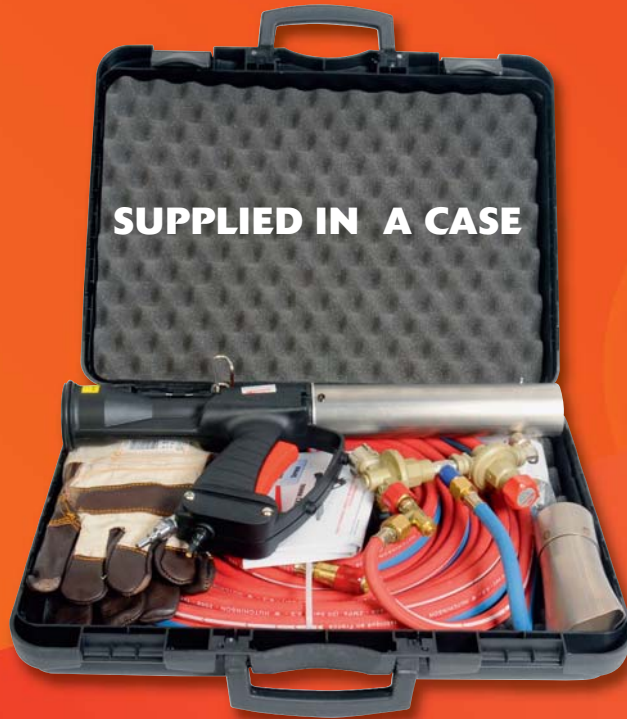


SUPPLIED IN A CASE

The case includes :

A SIROCCO pistol-grip blowtorch with no visible flame



- + 1 HP regulator (operating range 1.5 to 3 bar)
- + 1 pre-assembled 8-metre Ø 6.3 mm double hose (air + gas)
- + 1 flat nozzle (small cross-section) 70x13 mm
- + 1 pair of gloves and set of connectors
- + 1 support base
- + 1 operating manual

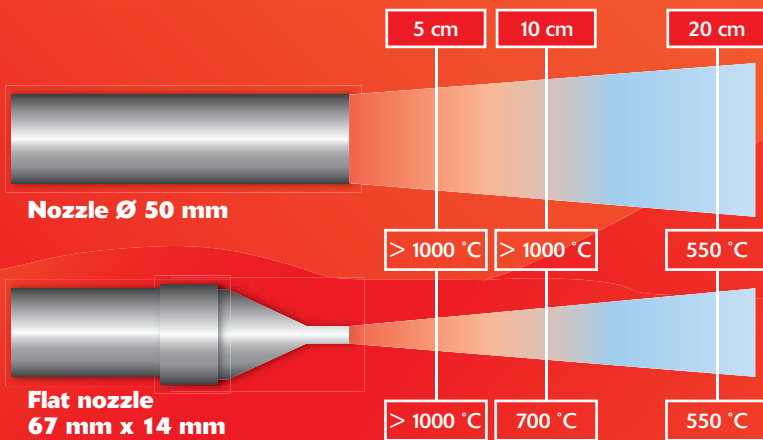

SIROCCO Ref. 4010

ENERGY SOURCE	Propane + compressed air	
OPERATING PRESSURE (bar)	1.5 to 3	
ADJUSTABLE POWER (1.5 > 3 bar)	from 7 to 12 kW	
FLOW RATE (g/h)	745 g/h to 2 bar	
WEIGHT (kg)	< 1kg	
AIR CONSUMPTION (l/min at 2 bar)	10,2	
SAFETY DEVICE	Safety handle	
EXCESS FLOW	Excess flow safety device on regulator gauge	
ADJUSTABLE ACCESSORIES	Thermal reflector Anti-obstruction "Air" clip	
AIR COMPRESSOR REQUIRED	Output : Over 20 l/min	Pressure : 6 bar

Distributor's stamp

Tel.: +33 1 53 99 16 98 • Fax: +33 1 53 99 16 56

www.express.fr