

**EXPRESS**  
depuis 1905



STAINLESS  
**STEEL'EXPRESS**





FR Composez votre chalumeau.  
 GB Make up your own torch.  
 DE Erstellen Sie Ihre eigenen Brenner.  
 IT Comporre il proprio cannello.  
 ES Componer su propia lanza.  
 SE Skapa din egen brännare.  
 DK Opret din egen brænder.  
 NL Stel uw eigen brander same.  
 PL Stwórz własny palnik.



## 4740

FR Pied en polyamide chargé de fibre de verre.  
 GB Twist lock stand in glass-fibre-reinforced polyamide.  
 DE Fuß anpassungsfähig ohne Werkzeug, aus Polyamid glasfaserverstärkt, für Anwärmbrenner.  
 IT Piede in poliammide caricato di fibradi di vetro.  
 ES Pie en poliamida cargado de fibra de vidrio.  
 SE Stödfot i glasfiberarmerad polyamid.  
 DK Support af glasfiberforstærket polyamide.  
 NL Manueel verstelbaar voetstuk in polyamide/glasvezel voor brander.  
 PL Podnózek z poliamidu wzmocnionego włóknem szklanym.



FR N'utiliser que dans des locaux suffisamment aérés.  
 GB Only use in sufficiently ventilated areas.  
 DE Nur in ausreichend belüfteten Bereichen verwenden.  
 IT Utilizzare solo in locali ben aerati.  
 ES Sólo utilizar en locales suficientemente ventilados.  
 SE Använd endast i lokaler med tillräcklig ventilation.  
 DK Må kun anvendes i godt ventilerede lokaler.  
 NL Uitsluitend gebruiken in goed geventileerde ruimten.  
 PL Używać tylko w dobrze wietrzonych pomieszczeniach.

## Guilbert Express

33 avenue du Maréchal de Lattre de Tassigny  
 F - 94127 FONTENAY-SOUS-BOIS Cedex


info@express.fr

www.express.fr

32991 h




	35 S		50 S		100 S	
Ø	40 mm	1,57 in	50 mm	1,96 in	60 mm	2,36 in
⚖ (g)	111,5		146,5		193,5	
Propan	1,5 - 4 bar	21 - 58 psi	1,5 - 4 bar	21 - 58 psi	1,5 - 4 bar	21 - 58 psi
g/h (4 bar)	2 716		3 911		7 394	
kW (4 bar)	37		54		102	
BTU (58 psi)	127 887		184 157		348 172	



	35 S		50 S		100 S	
0 1 2 3	550 mm	21,65 in	650 mm	25,59 in	800 mm	31,49 in
Ø	95 mm	3,74 in	110 mm	4,33 in	120 mm	4,72 in



	L 600		L 400		L 200	
0 1 2 3	600 mm	23,62 in	400 mm	15,74 in	130 mm	5,11 in
⚖ (g)	252		196,5		122	

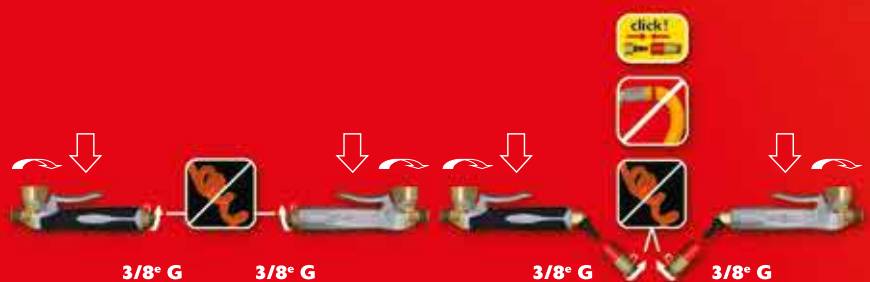

620 plastic	640 metal	620CR plastic	640CR metal
-------------	-----------	---------------	-------------



	963/5		963/10		963/20S	
0 1 2 3	4,75 m	15 ft	10 m	33 ft	20 m	65,50 ft



684	686 ≤ 50 kW
4b	2b > 4b