



CONNECTORS

- 911 Quick-release coupling + nipple for 620 and 640 handles
- 912 Nipple for quick-release coupling 911

HOSES

- 963/20 Connection kit (2 nipples + 2 nuts + 2 hose clamps with 3/8" left-hand thread)
- 963/20S
- 963/20SP **NEW**
- 963/10
- 963/5

REGULATORS

- 684 4 bar - 58 psi
- 694 2 to 4 bar 29 to 58 psi
- 684 4 bar - 58 psi
- Recommended for 100 kW - 341 000 BTU/h and 150 kW - 512 000 BTU/h burners
- OPTION :** 18092 Safety valve for 682 and 684 regulators

CYLINDERS


- 13 kg - 28.66 lb propane 35 kg - 77.16 lb propane
- 18970 Connection kit for 13 kg - 28.66 lb and 35 kg - 77.16 lb cylinder

TIGHTNESS INSPECTION



DRYING POWDER



- 848 Specially designed to absorb and retain rainwater on flat roofs covered with bitumen. 1 kg box (P.U : 6)

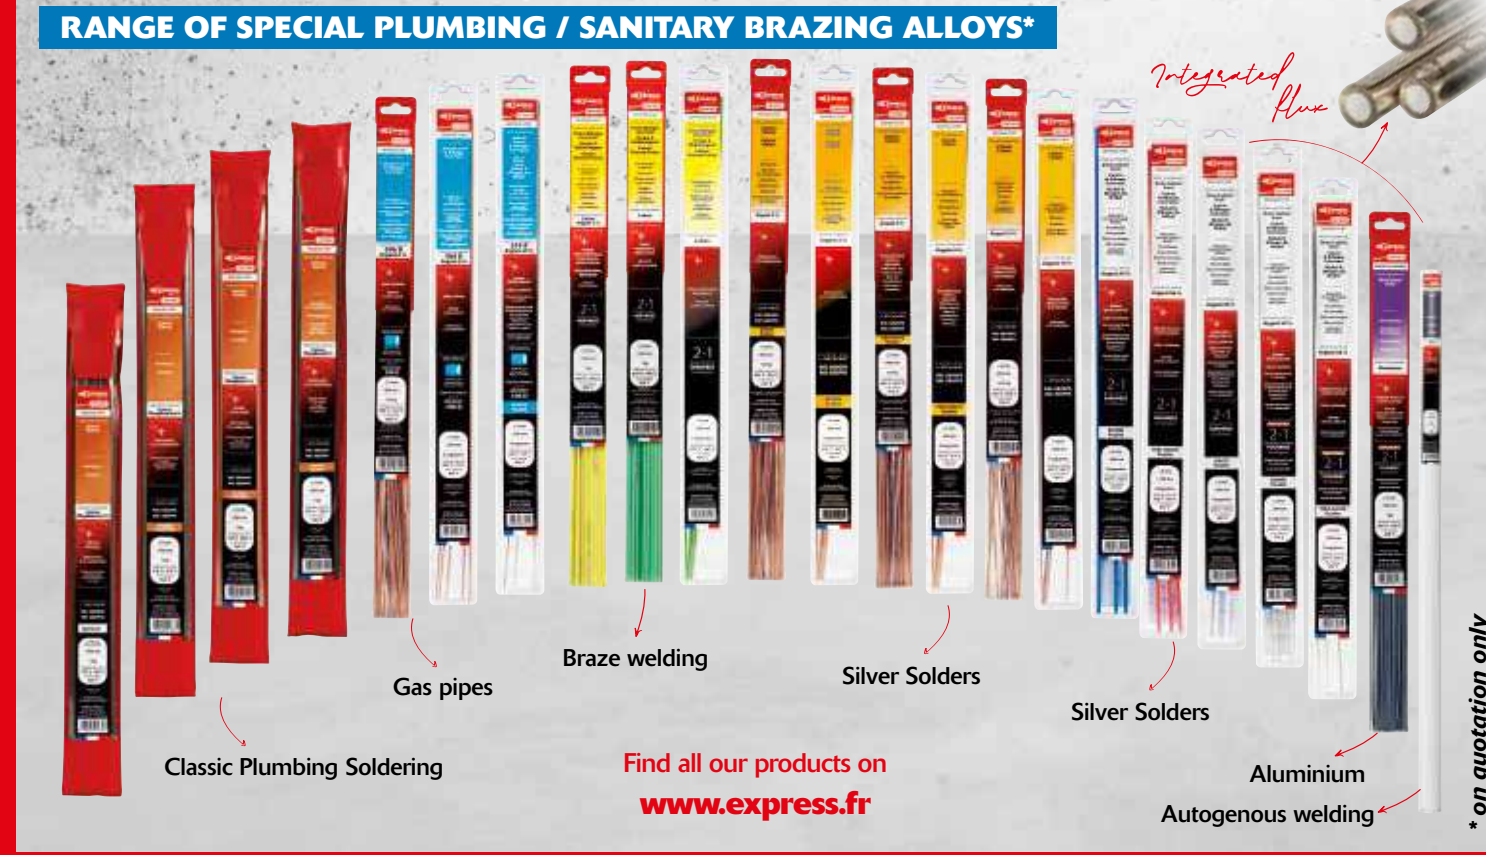


Find all our products on www.express.fr
GUILBERT EXPRESS
 ZAE de Lamirault - 10 rue Henry Delbast - F-77183 Croissy-Beaubourg
 0825 800 251



Assembly combinations

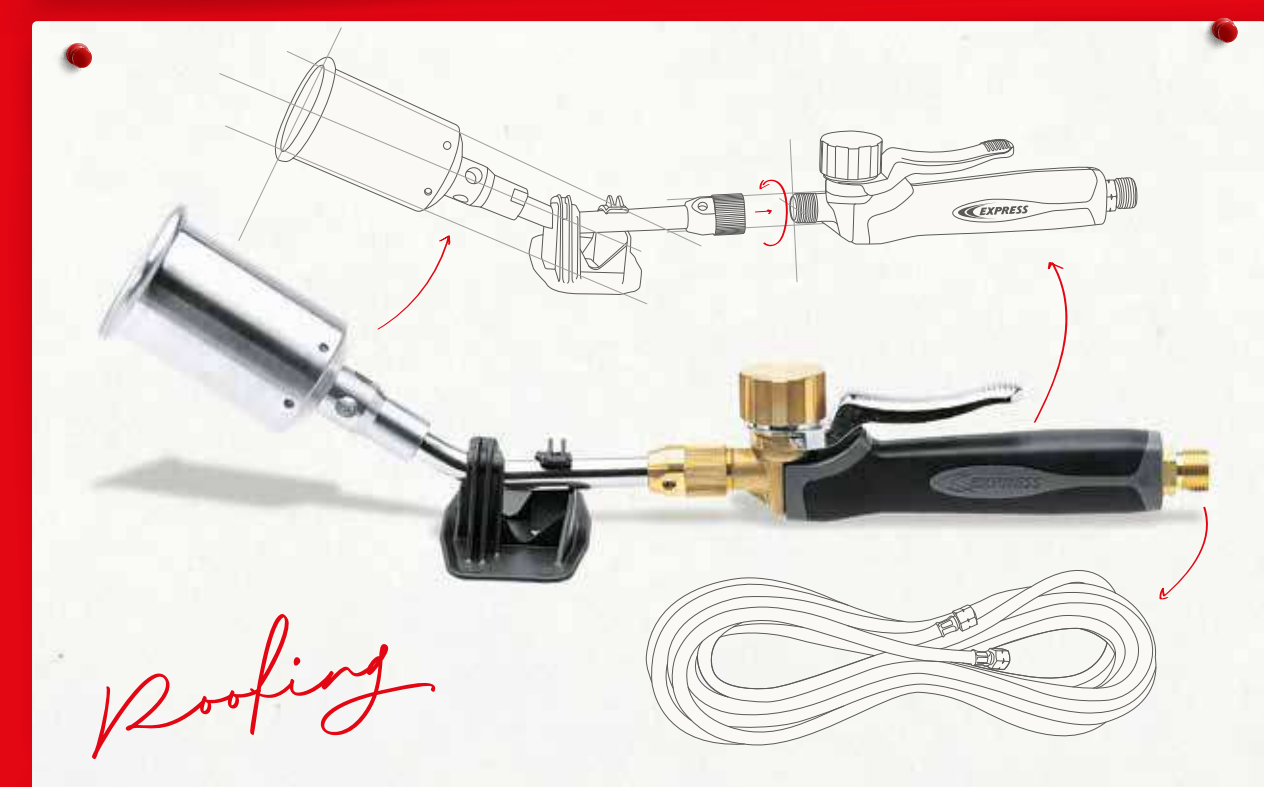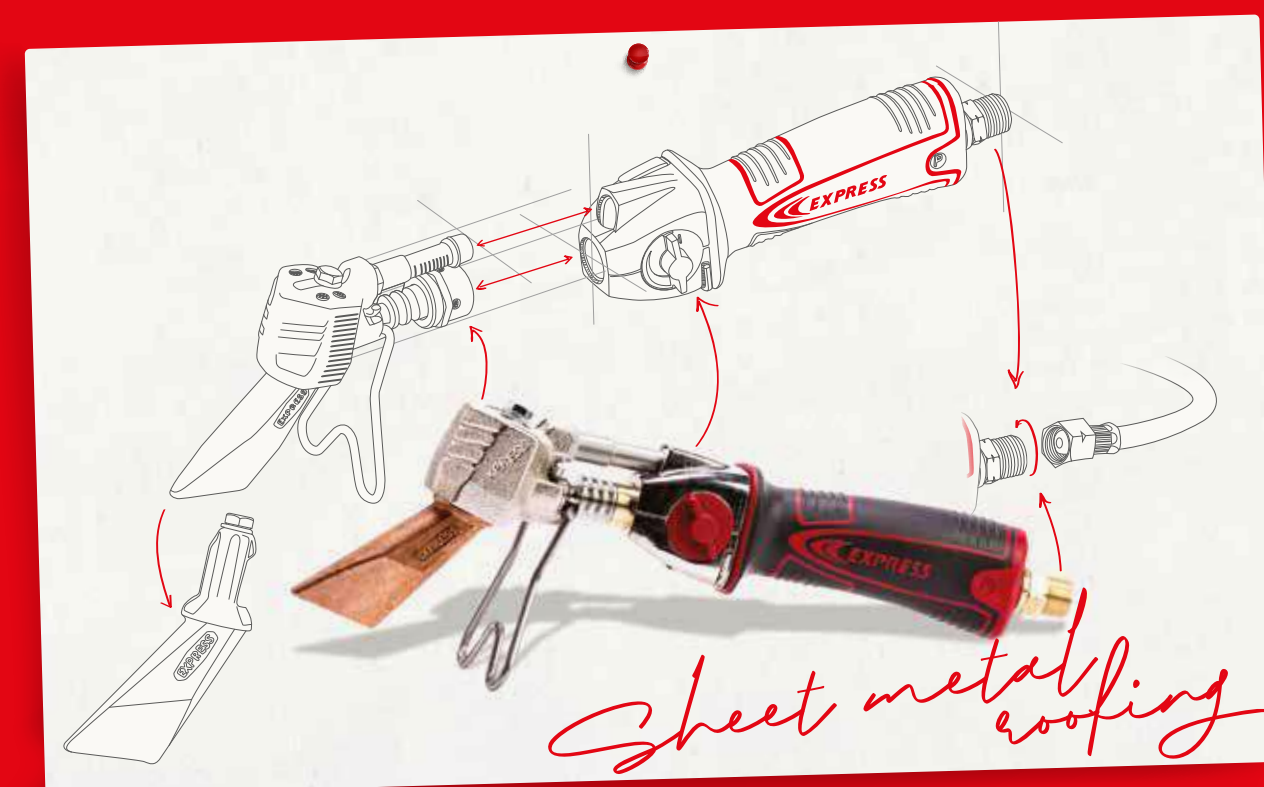

Flame bitumen roofing soldering tools assembly combinations

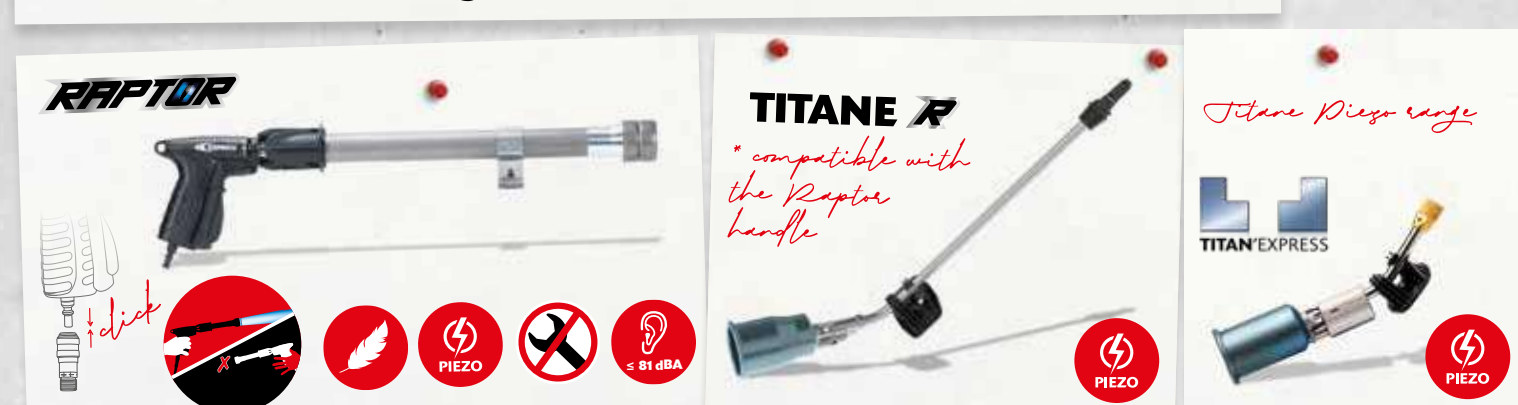

BURNERS & NECK TUBES

- RAPTOR**: 1030, 1070, 1090, 1150
- TITANE R**: 50RL200, 100RL200, 150RL200, 100RL400, 150RL400, 150RL600
- TITANIUM PIEZO**: 50TPL200, 150TPL200, 100TPL400, 150TPL400
- CLASSIC**: 50TL200, 150TL200, 100TL400, 150TL400, 150TL600
- CLASSIC**: 35SL200, 50SL200, 100SL200, 50SL400, 100SL400, 100SL600
- FOR BURNING HEATING**: 1660, 1662

HANDLES

- 660
- 42305
- 605WR
- 650
- 620
- 640
- 620CR
- 640CR

STEEL RANGE

- 5500
- 5501
- 5502
- 5503
- 5504


Guilbert Express SAS, a company with share capital of 648,000€, registered at the Meuse Trade and Companies Registry under the number 572 083 812 - Actual products may differ from photographs. April 2024.

Tinning paste, salmiak stones, brushes

Cat. No. 9640

Classic holder (P.U : 2)

APPLICATIONS
Cleaning copper tips with the salmiak stone. Fluxing of zinc with the flux pot and brush

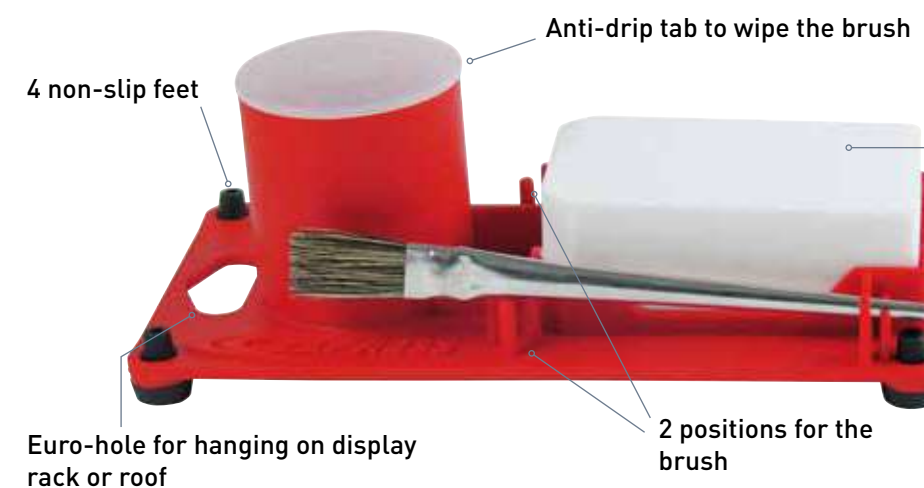

Cat. No. 9641

Salmiak stone specially designed for Classic holder 9640 and Premium holder 9645 (P.U : 6)

TECHNICAL INFO
Weight : 140 g - 0.31 lb
Dimensions : 80 x 51 x 25 mm
3.15 x 2 x 0.98 in



Cat. No. 9642


Standard salmiak stone (P.U : 6)

TECHNICAL INFO
Weight : 150 g - 0.33 lb
Dimensions : 65 x 45 x 38 mm
2.56 x 1.77 x 1.50 in



Cat. No. 9645

Premium holder (P.U : 2)

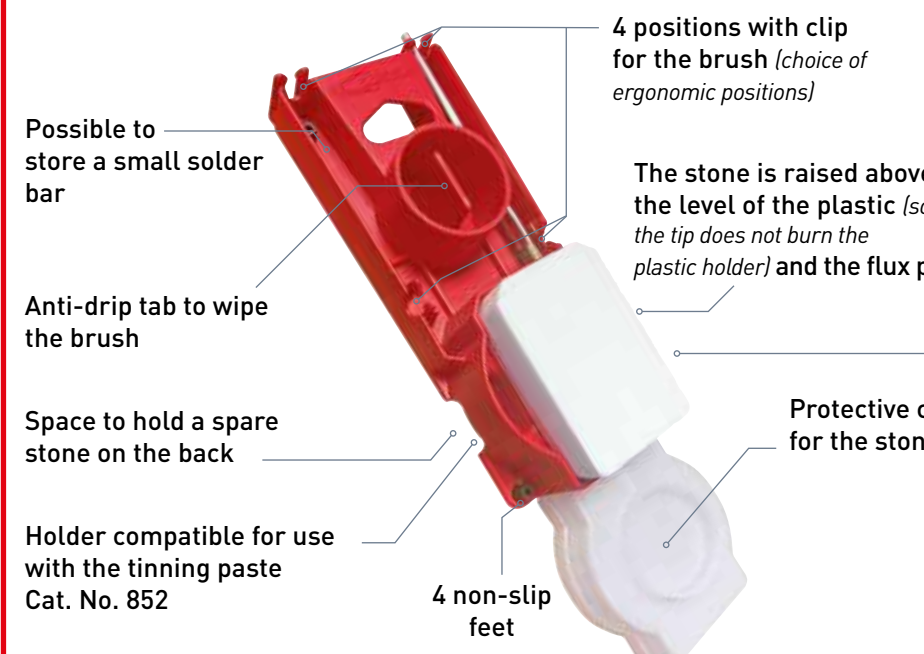

Cat. No. 9647

Box of bottles for flux with integrated brush (P.U : 6)



Cat. No. 9643 Cat. No. 9644

Horsehair brush for flux (P.U : 1) x 2 x 25




Cat. No. 852

Tinning paste (P.U : 12)



Sheet metal roofing soldering tools assembly combinations

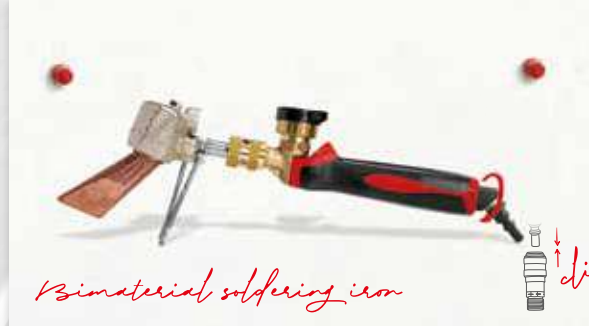

Materials
✓ Steel-reinforced cast iron casing with anti-corrosion treatment
✓ Stainless steel venturi
✓ Brass valves

Tips
✓ Copper 99,9 %
✓ Ø 360°
✓ T° 600 °C - 112 °F ± 5°


	TIPS	BURNERS	SOLDERING IRONS & HANDLES	CONNECTORS	HOSES	REGULATORS	CYLINDERS
OLD GENERATION	332 333 335		330-3	911 Quick-release coupling + nipple for 620 and 640 handles 912 Nipple for quick-release coupling 911	963/5 963/10 963/20	682 2 bar - 29 psi	18980 Twiny, Elfi Propane 18987 Cube Propane
OLD GENERATION	648 649	2648 2649	602 600		963R Connection kit (2 nipples + 2 nuts + 2 hose clamps with 3/8" left-hand thread)	OPTION : 18092 Safety valve for 682 and 684 regulators	13 kg - 28.66 lb propane 35 kg - 77.16 lb propane
CLASSIC	672 675 678 679	4675 4678 4679	603CR	911 Quick-release coupling + nipple for 620 and 640 handles 912 Nipple for quick-release coupling 911	963/20S 963/20SP		Refill connectors 7795 Fixed OR 7795S Flexible
TURBO	778 779	4367/8 V18	367/8 367/9		NEW 963/20SP		7796
LONG LIFE	1778 1779 1772		364 Hoseless soldering iron		445 GAS CARTRIDGE		

Flux and sticks of solder lead free



Cat. No. 839
Universal flux (P.U : 12)
320 ml - 11.26 fl oz

APPLICATIONS
• All metals (except aluminium and aluminium alloys)
• All areas of application (except drinking water pipes)
• Transparent gel texture suitable for sloped roofs

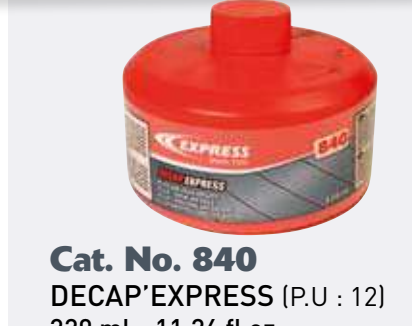

Cat. No. 840
DECAP'EXPRESS (P.U : 12)
320 ml - 11.26 fl oz

APPLICATIONS
• Recommended for new zinc and lead
• Alternative for copper



Cat. No. 845
SUPER DECAP'EXPRESS (P.U : 12)
320 ml - 11.26 fl oz

APPLICATIONS
Recommended for oxidized zinc




Cat. No. 847
Super flux for natural zinc (P.U : 12) 1 L - 35.20 fl oz

APPLICATIONS
• Recommended for new natural zinc or very oxidized zinc
• Alternative for pre-weathered zinc, plastic-coated zinc (subject to prior scrubbing with brush), new zinc, copper, pre-tinned stainless steel




Cat. No. 850
Flux for pre-weathered zinc (P.U : 12) 250 ml - 8.80 fl oz

APPLICATIONS
• Recommended for pre-weathered zinc
• Alternative for plastic-coated zinc (subject to prior cleaning with brush), new zinc, oxidized zinc

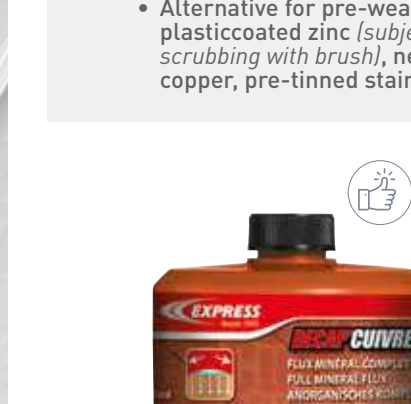


Cat. No. 851
DECAP'CUIVRE (P.U : 6)
320 ml - 11.26 fl oz

APPLICATIONS
• Recommended for copper
• Alternative for new, oxidized and pre-weathered zinc, and pre-tinned stainless steel

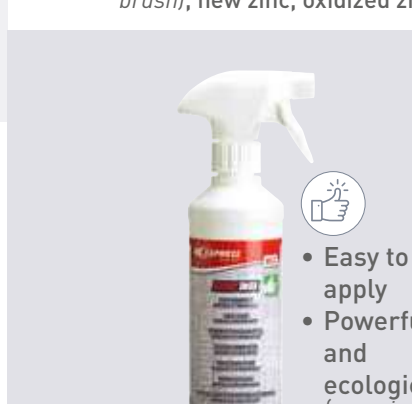

Cat. No. 853
DECAP'INOX (P.U : 6)
500 ml - 17.60 fl oz

APPLICATIONS
• Recommended for pre-tinned stainless steel
• Requires scrubbing with brush

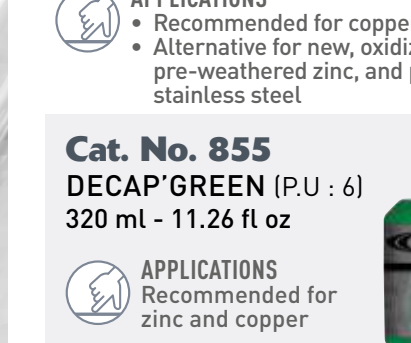

Cat. No. 855
DECAP'GREEN (P.U : 6)
320 ml - 11.26 fl oz

APPLICATIONS
Recommended for zinc and copper

Ecological product
Contains no zinc chloride :
• No toxic fumes
• Protects plants and animals
• Avoids any corrosion between the zinc and weld



Cat. No. 1934
Sticks of solder lead free (P.U : 1)
2 units



Cat. No. 1936
Sticks of solder lead free (P.U : 1)
20 units

TECHNICAL INFO
90% Tin
10% Zinc